
PIG® Absorbent Pillow

#PIL201 - 17" x 21" x 2" • Absorbs up to 2 gal. per pillow • 16 pillows



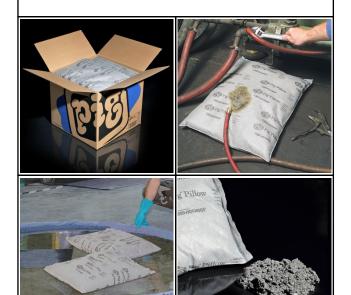

Add extra absorbency to your spill cleanup efforts with high-capacity PIG Pillows. Also great for steady leaks and drips.

- Pillow has large surface area, high capacity and fast-wicking filler to quickly soak up liquids
- Polypropylene skin resists tearing; reduces dust and holds in liquid, even when saturated
- Cellulose filler is highly absorbent for long-term use or big spill cleanup
- Compact design is great for catching persistent drips and leaks in small spaces or adding absorbency for spill response
- Absorbs and retains oils, coolants, solvents and water; not recommended for acids, bases or other corrosive liquids
- Recycled content is ideal when green products are desired or required
- Can be incinerated after use to reduce waste or for fuels blending

Always in stock. Ships within 24 hours.

Pricing (based on quantity)

| 1-2 | 3-9 | 10+ |
|----------|----------|----------|
| \$115.00 | \$107.00 | \$103.00 |



New Pig

PIL201 Specifications

Color: Light Gray

Dimensions: 17" W x 21" L x 2" H

Fluids Absorbed: Oils, Coolants, Solvents & Water

Recycled Content: 99% Mixture of Pre- and Post-Consumer

Recycled Cellulose Filler

Absorbency: Up to 32 gal. per box
Absorbency per: Up to 2 gal. per pillow
Sold as: 16 pillows per box

Weight: 28.00 lbs.

National Stock Number 4235-01-442-4745

(NSN):

per Pallet: 12

Composition: Skin - Polypropylene Filler - Cellulosic Fibers

PIL201 Metric Equivalent

Dimensions: 43.2cm W x 53.3cm L x 5.1cm H

Absorbency: Up to 121.1 L per box
Absorbency per: Up to 7.6 L per pillow

Weight: 12.7 kg

Technical Information

Warnings & Restrictions:

There are no known warnings and restrictions for this product.

Regulations and Compliance:

29 CFR 1910.22(a)(2) - Floors in the workplace should be, "maintained in a clean and, so far as possible, a dry condition."

Technical Documents:

(Available at newpig.com)
Product Data Sheet (PDS)

Material Safety Data Sheet (MSDS)



